


Rave have added high resolution PSLV2 Indoor
2.5 LED Screen their rental stock

CURVABLE DESIGN, -10° TO 10° CAN BE ADJUSTED



- High Precision DIE Cast Aluminum Cabinet
- Special protective design can prevent LED damage caused by unexpected impact
- Improved multi-function locks (self-locking) and precise mini-trim making for seamless screen
- Module front or rear maintenance for easy and fast maintenance

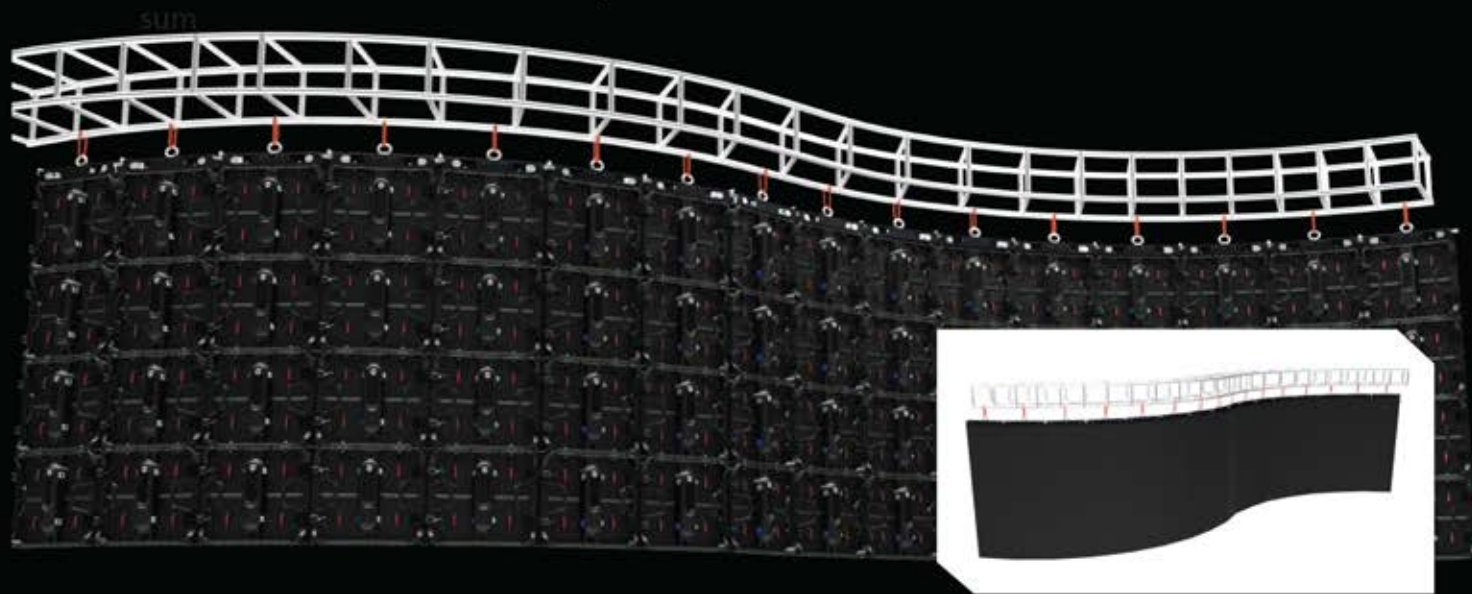

Parameter	PSLV2
LED Type	SMD
Pixel Pitch (mm)	2.5
LED Density (pixel/m ²)	160,000
Cabinet Resolution	200 x 200
Scans	1/25
Brightness (nits)	1000
Refresh Rate (Hz)	3840
Contrast Ratio	5000:01:00
Color Gray Scale (level)	16 bit
Power Consumption (Max./Avg.) (W/m ²)	630/210
Viewing Angle (H/V) (°)	160/160
Voltage (V) (50~63Hz)	AC200~240
Cabinet Dimensions (WxHxD) (mm)	500x500
Cabinet Weight (kg)	7.5
Module Dimensions (mm)	250x250
Cabinet Material	die-casting aluminum
Operation Temperature (°C)	-10 to 40°C
Operation Humidity (RH)	10%~85%
Module Maintenance	Front and Rear
PSU & Others Maintenance	Rear
IP rating (Front & Raer)	IP40/IP21

