


One Man Installation

Quick and simple to use top locks, designed for easy one man handling

Edge Protection

Stop designed on bottom of the cabinet, keeps LEDs away from ground

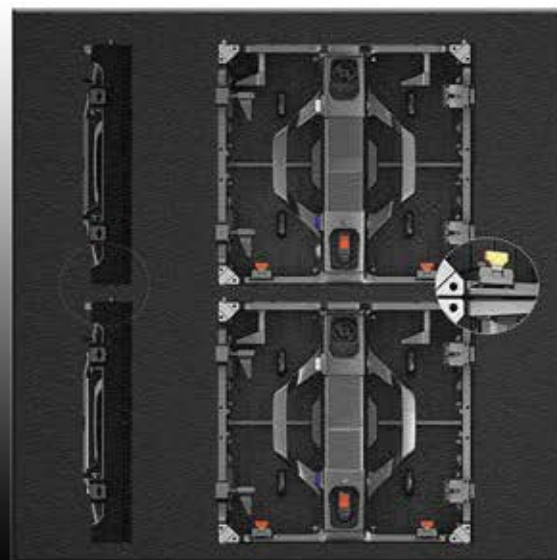

Front & Rear

Module Maintenance

Supports front & rear maintenance easy to replace module

Quick Swappable

Power Box

Replace in seconds with a quick release system. Serviceable from the back without tools.



Waterproof Design

IP65/54 waterproof design ultra reliable in all weather Condition

Higher Image Quality

Combined with grey scale coding technology that is human eye friendly, the new control system has greatly improved the industry-common problem of losing grey scale at low brightness, to provide a much more vivid image.



P.O Box : 859 Dubai, UAE



Email: mac@rave.ae



Tel: +971 4 885 9300



Web: www.rave.ae

Fast and Accurate

Professional curve connection with two side locks

Curve System

-7.5°, -5°, -2.5°, 0°, +2.5°, +5°, +7.5°, +10°

Extremely Rugged

TECHNICAL SPECIFICATIONS

Pixel Pitch	4.8 mm
Brightness	4000
Panel Dimensions	500*500*87
Panel Material	Die Cast Aluminum
Panel Weight	9.5 Kgs
Pixels	SMD 1921
Module Size	250*250
Panel Resolution	104*104
Pixel Density	43264
Refresh Rate	1920
Greyscale	16384
Viewing Angle (H/V)	140/120
Ingress Protection	IP65/IP54
Power (max/ave)	540/180 watts/sqm
Maximum Hanging	20



P.O Box : 859 Dubai, UAE



Email: mac@rave.ae



Tel: +971 4 885 9300



Web: www.rave.ae